




NEI Manufacturing Bearing LTD.

75 mm x 115 mm x 20 mm NTN 6015ZZ deep groove ball bearings

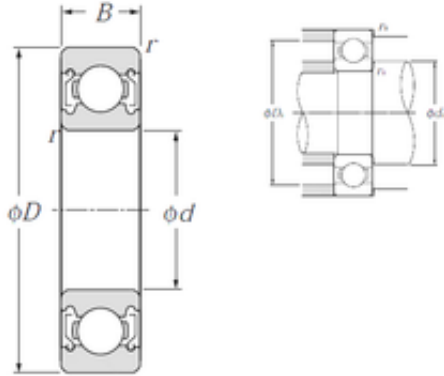

Bearing No. 6015ZZ

6015ZZ Bearing 2D drawings and 3D CAD models

Size	75x115x20 mm
Bore Diameter	75 mm
Outer Diameter	115 mm
Width	20 mm
d	75 mm
D	115 mm
B	20 mm
C	20 mm
rn	0,5 mm
r min.	1,1 mm
da min.	81,5 mm
da max	85,5 mm
Da max.	108,5 mm
ra max.	1 mm
Weight	0,649 Kg
Basic dynamic load rating (C)	39,5 kN
Basic static load rating (C0)	33,5 kN
(Grease) Lubrication Speed	5 700 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004168
Product Group	B00308



NEI Manufacturing Bearing LTD.

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	75MM Bore; 115MM Outside Diameter; 20MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.64
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	4.528 Inch 115 Millimeter
Bore	2.953 Inch 75 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	75 mm
precision rating:	ISO Class 0
outside diameter:	115 mm



NEI Manufacturing Bearing LTD.

finish/coating:	Uncoated
overall width:	20 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	20 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	20 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	5700 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	6700 RPM
dynamic load capacity:	33500 N
series:	60
static load capacity:	33500 N
manufacturer product page:	Click here